

Cusp Disk Surface Mounts

With PIR on/off sensor



Project:	Part #:
Type:	

Surface Mounts









Detail Specifications:

- · Finish: White
- IP Rating: Wet Location
- Beam Angle: 100°
- Chip: SMD 2835, R9 >50, CRI >90 3 Step MacAdam Ellipses
- Operating Temperature: -40° 114° F
- · Lens: Frosted Acrylic, non-yellowing
- Housing: MetalAverage life (L70) of 50,000 hours

Applications:

- · General Recessed Lighting
- Residential & Multifamily
- · Office and Meeting Rooms
- · Education, Healthcare, Retail, Hospitality

Product Information:

- · Motion sensor turns off after one minute
- · AC technology: slim and easy driverless installation
- · Ideal for remodel and new construction use
- · Slim and sleek design

Driver Options:

- · This fixture is non-dimmable
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- AC Driverless technology
- Flicker Free

- Mounting & Installation:
 30/40 Junction Box (including pancake j-box)
- Surface mount bracket included

Certifications:

- ETL Listed for USA and CA
- · Energy Star Certified
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight
- Complies with UL 263, ASTM E119, CAN ULC S101
- Closet Rated

Series

LED-CDSK-4-10W-5CCT-WH-PIR

650Lm • 27/30/35/40/50K LED-CDSK-6-15W-5CCT-WH-PIR

1,000Lm • 27/30/35/40/50K

Optional Accessories (Order Separately)

Emergency Backup

LED-EMB-25W-HV-2P


For fixtures up to 25W

Specs and model numbers are subject to change with or without notice. Customization of product is available.





Cusp Disk Surface Mounts With PIR on/off sensor

FEATURES

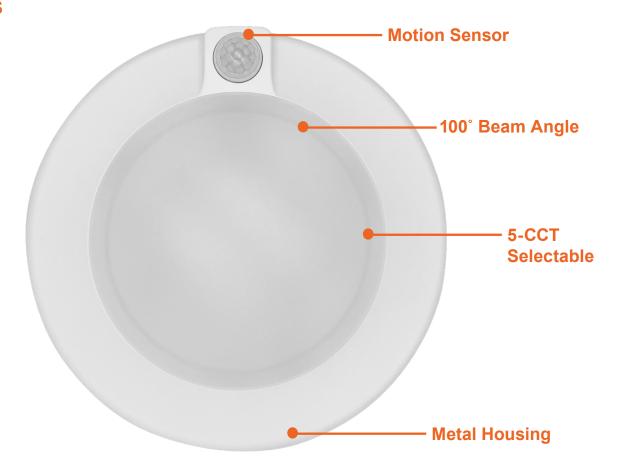

DIMENSIONS








Model	Voltage	Watts	Lumens	Color	CRI
LED-CDSK-6-15W-5CCT-WH-PIR	120V	15w	1000	27/30/35/40/50K	>90
LED-CDSK-4-10W-5CCT-WH-PIR	120V	10w	650	27/30/35/40/50K	>90

BATTERY BACK-UP

Accessory	Description
LED-EMB-25W-HV-2P	Up to 25W fixtures







LED-EMB-25W-HV-2P