

SL-Line: Wall Pack

3-CCT + 5-Power Selectable

Wall Packs



WATT	LUMENS
30	3,900
40	5,200
60	7,800
80	10,400
100	13,000
120	15,600

Detail Specifications:

- Finish: Bronze, Custom finishes available
- IP Rating: Wet Location
- Impact Rating: IK08
- Beam Angle: Type IV
- BUG:
 - 3P60W: B3-U3-G5
 - 3P120: B4-U4-G5
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -4° - 122° F
- Lens: Glass Lens
- Average life (L70) of 70,000 hours

Applications:

- Walkways & Pathways
- Parking Lots
- Hospitality, Multi-Family
- Outdoor Corridors
- Residential, Commercial and Industrial

Product Information:

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- Slim in size and easy to install
- Photocell is included with an easy quick disconnect
- Instant-On to full brightness

Driver Options:

- UNV: 120-277V 0-10V Dimmable
- HV: 277-480V 0-10V Dimmable
- Built in 6Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

Mounting & Installation:

- Five 1/2" knockouts: 1 one each side for convenient installation

Certifications:

- UL Listed for USA and CA
- DLC Listed
- ROHS Compliant
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series

LED-WPF-SL-3P60-TRI
30/40/60W • 30/40/50K
LED-WPF-SL-3P120-TRI
80/100/120W • 30/40/50K

Finish¹

BZ
Bronze
(Standard)
BL¹
Black
WH¹
White
GRY¹
Gray
CS¹
Custom
Color

Photocell

PC
Photocell
is included.
Easy quick
disconnect.
(PC-3/4-
3PIN-LV)

Voltage

UNV
120-277V
HV
277-480V

Sensor²

(blank)
No Sensor
BMS
Bi-Level
Motion
+ Daylight
Sensor
(HB01DMS-C)
BMS1
Bi-Level
Motion +
Daylight Sen-
sor (S-BMS-
EXT-1)
BMS1BT
Bi-Level
Motion +
Daylight
Sensor -Blue-
tooth Control-
(S-BMS-
EXT-1-BT)

Emergency

(blank)
No Emergency
EMB
Emergency
Backup

Surge Protector

(blank)
6KV Built in
20KV
20KV Surge
Protector

Optional Accessories (Order Separately)

Remote for Sensors

HB03R
HB01DMS
Remote
S-LINE-R
S-Line
Remote

Shield

WPF-SL-SHIELD
Shield

1. Standard quickship
is bronze. Other
colors are custom
finishes


2. Sensors require remote
for programming

Specs and model numbers are subject to change with or without notice.

FEATURES



DIMENSIONS

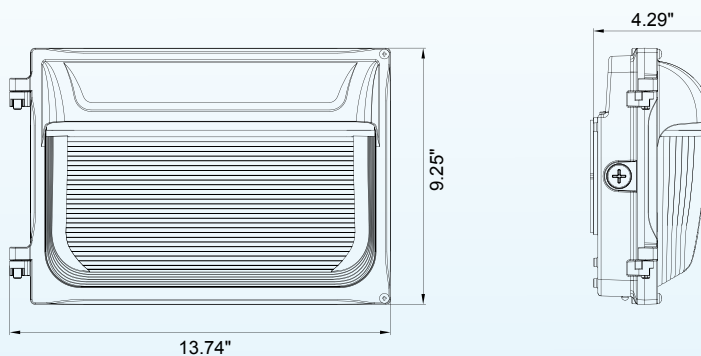

SL-Line: Wall Pack

3-CCT + 5-Power Selectable



HB03R




S-LINE-R



HB01DMS-C



S-BMS-EXT-1
S-BMS-EXT-1-BT



WPF-SL-SHIELD

WALL PACK

Model	Voltage	Watts	Lumens	Color	CRI
LED-WPF-SL-3P60-TRI-BZ-UNV-PC	120-277V	60/40/30w	3,900/5,200/ 7,800	30/40/50k	>80
LED-WPF-SL-3P120-TRI-BZ-UNV-PC	120-277V	120/100/80w	10,400/13,000/15,600	30/40/50k	>80
LED-WPF-SL-3P60-TRI-BZ-HV-PC	277-480V	60/40/30w	3,900/5,200/ 7,800	30/40/50k	>80
LED-WPF-SL-3P120-TRI-BZ-HV-PC	277-480V	120/100/80w	10,400/13,000/15,600	30/40/50k	>80

REMOTE CONTROL

Accessory Model	Description
HB03R	Remote for HB-Line Series
S-LINE-R	Remote for S-LINE Series Sensors

HB-LINE-SENSORS

Model	Item Description	Voltage	Watts
HB01DMS-C	Bi Level Motion Sensor w/ Daylight Harvesting 1/2" Knockout - Includes Auxilarary	12V	<1w
S-BMS-EXT-1	S-Line: Bi Level Motion Sensor w/ Daylight Harvesting, Ideal for use with LED WALLPACKS. 12V Aux REQD. (Remote Required)	12V	<1w
S-BMS-EXT-1-BT	S-Line: Bi Level Motion Sensor w/ Daylight Harvesting, Ideal for use with Wallpacks. 12V Aux REQD. (Remote Required)	12V	<1w

SHIELD

Accessory Model	Description
WPF-SL-SHIELD	Cout off shield