

Slim-Line: Square Canopy Fixtures

3-CCT & 3-Power Selectable



WATT	LUMENS
25	3,625
40	5,800
60	8,700

Detail Specifications:

- Finish: White or Bronze
- IP Rating: Wet Location (IP65)
- Beam Angle: 150°
- Chip: SMD 2835, R9 >50, CRI >80
- 3 Step MacAdam Ellipses
- Operating Temperature: -4° - 124° F
- Lens: Clear Ribbed
- Average life (L70) of 50,000 hours

Applications:

- Utility & Storage
- Garage & Parking Structures
- Dock and loading
- Soffits
- Outdoor corridor
- Commercial and Industrial

Product Information:

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- Four 1/2" knockouts: 1 on each side for convenient installation
- Select-N-Switch Technology

Driver Options:

- UNV: 120-277V 0-10V Dimmable
- THD: <15% (=/-5% tolerance), PF >0.9, 50/60Hz
- Isolated Driver
- Flicker Free

Mounting & Installations:

- 30 or 40 J-Box Surface Mount
- 3/4" Pendant Mount

Certifications:

- UL Listed for USA and CA
- DLC Listed
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series	Wattage	CCT	Finish	Sensor	Emergency
LED-SCP	3P60	TRI	BZ	(Blank)	(Blank)
Square Canopy Fixtures	25/40/60W	30/40/50K	Bronze	None	None
			WH	BMS	EMB
			White	Bi-Level	Emergency Backup
				Motion	
				+ Daylight	
				Sensor	
				(HD407VC-R)	


Optional Accessories (Order Separately)

Sensor Remote



- HD03R**
Remote for
HD407V-CR
- HD05R**
Remote for
HD407V-CR
w/ Screen

Specs and model numbers are subject to change with or without notice

FEATURES

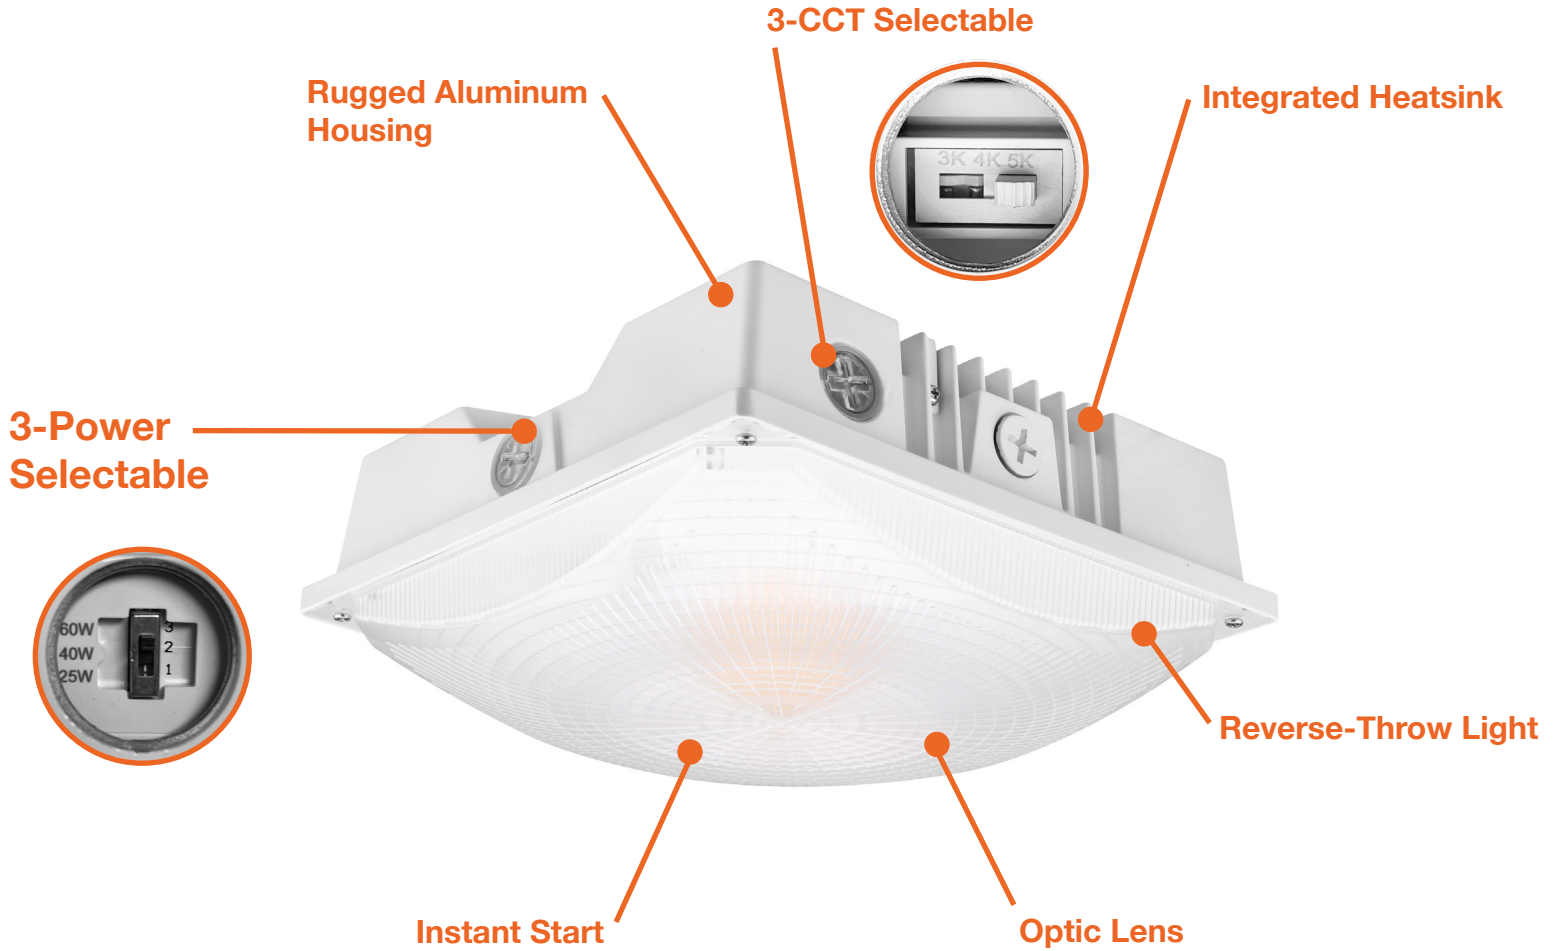

DIMENSIONS

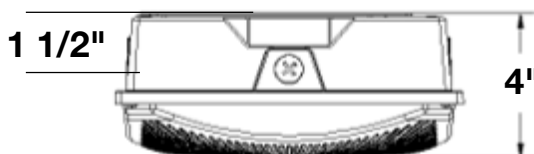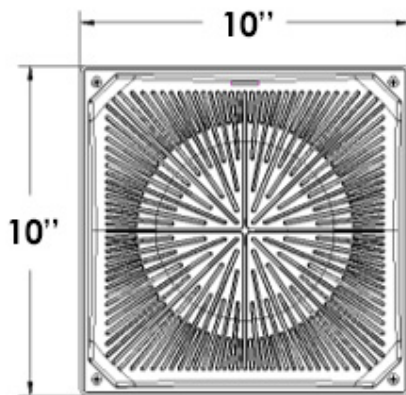

Model	Voltage	Watts	Lumens	Color	CRI
LED-SCP-3P60-TRI-WH	120-277V	25/40/60w	145lm/w	30/40/50k	>80
LED-SCP-3P60-TRI-BZ	120-277V	25/40/60w	145lm/w	30/40/50k	>80

H-LINE SENSORS

Model	Item Description	Voltage	Watts
HD407V-CR	Bi Level Motion Sensor w/ Daylight Harvesting Detachable Version w/ external sensor -Remote Control Compatible	120-277V	<1w
HD03R	Remote for HD Sensors	120-277V	<1w
HD05R	Remote for HD Sensors w/ Screen	120-277V	<1w



HD407V-CR



HD03R



HD05R